



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	BF	EC 0G3C 0739 04	08JAN05	BSV RB

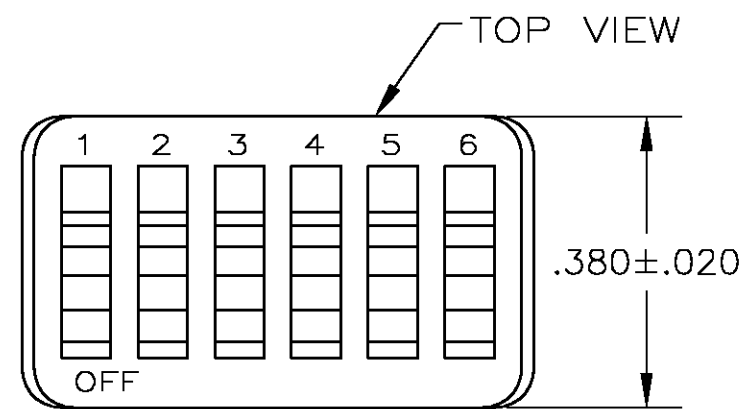



NOTCHES FOR
ROCKER ACTUATION

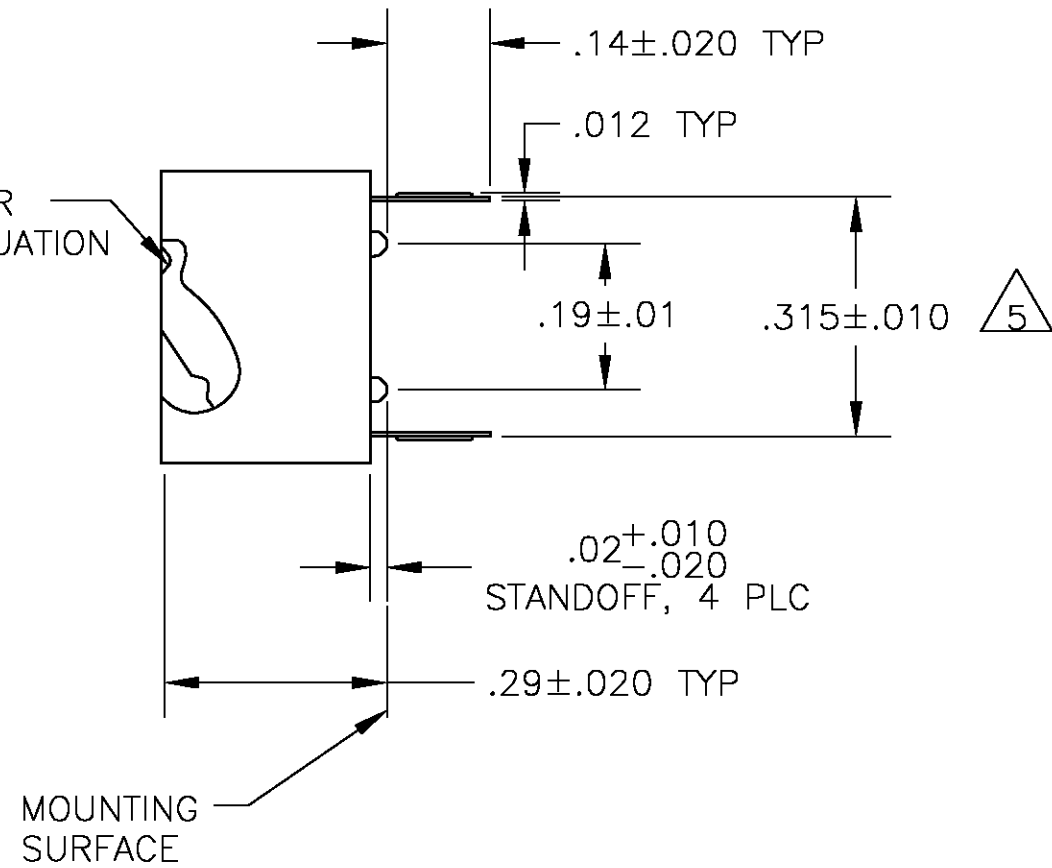

- FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- SWITCH SHOWN IN OPEN POSITION.
- ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- STAMPING WILL VARY ON 2 & 3 POSITION SIDES DUE TO SPACE RESTRICTIONS.

△5 .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300±.010 AT MOUNTING SURFACE.

△6 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).

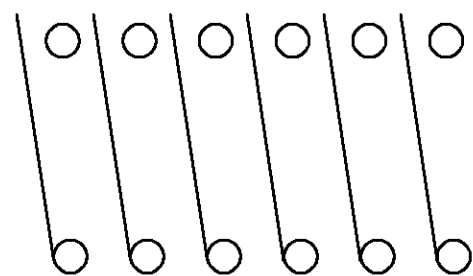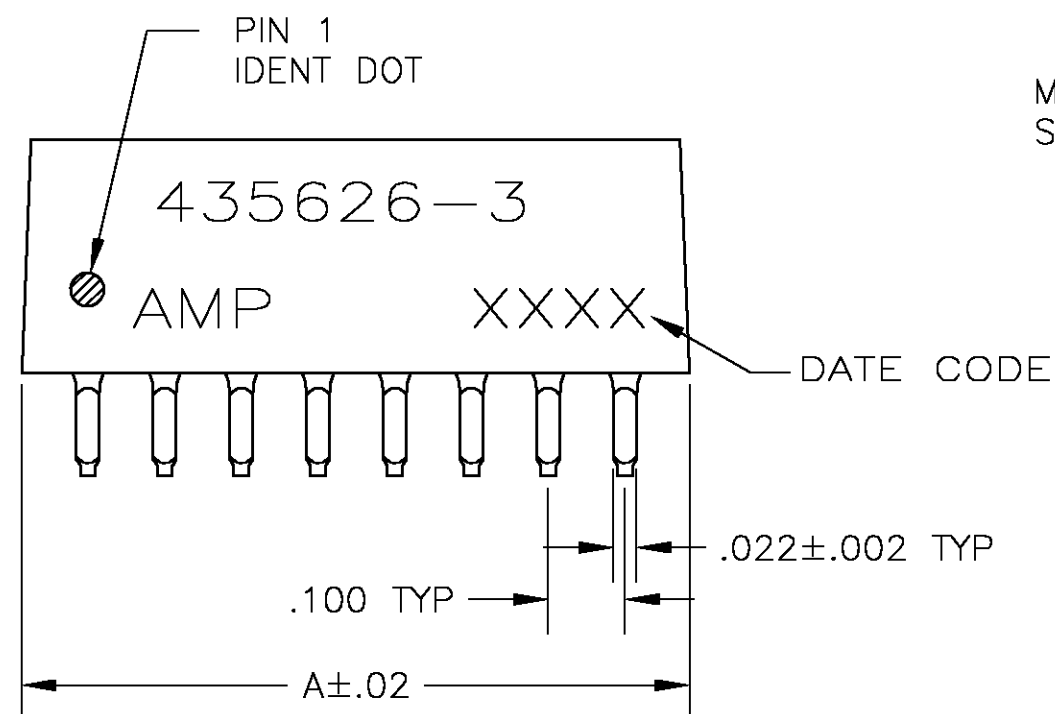

CONTACT ARRANGEMENT

FIG 1	SIZE	NO. OF POSN.	PART NO.
△6	1.08	10	9-435626-4
△6	.88	8	9-435626-2
△6	.78	7	9-435626-1
△6	.68	6	9-435626-0
△6	.48	4	8-435626-8
△6	.38	3	8-435626-7
△6	.28	2	8-435626-6
△6	.88	8	5-435626-5
△6	.58	5	5-435626-2
△6	.48	4	5-435626-1
△6			4-435626-9
△6	1.28	12	4-435626-6
△6	1.08	10	4-435626-4
△6	.98	9	4-435626-3
△6	.88	8	4-435626-2
△6	.78	7	4-435626-1
△6	.68	6	4-435626-0
△6	.58	5	3-435626-9
△6	.48	4	3-435626-8
△6	.38	3	3-435626-7
△6	.28	2	3-435626-6
△6	.28	2	1-435626-9
△6	1.08	10	435626-7
△6	.88	8	435626-5
△6	.78	7	435626-4
△6	.68	6	435626-3
△6	.58	5	435626-2
△6	.48	4	435626-1

OBSOLETE
 OBSOLETE
 SUPERSEDED BY 2-435668-9
 OBSOLETE
 OBSOLETE
 OBSOLETE
 OBSOLETE
 SUPERSEDED BY 2-435668-7
 SUPERSEDED BY 435668-5
 435626-3 SHOWN

AS SHOWN

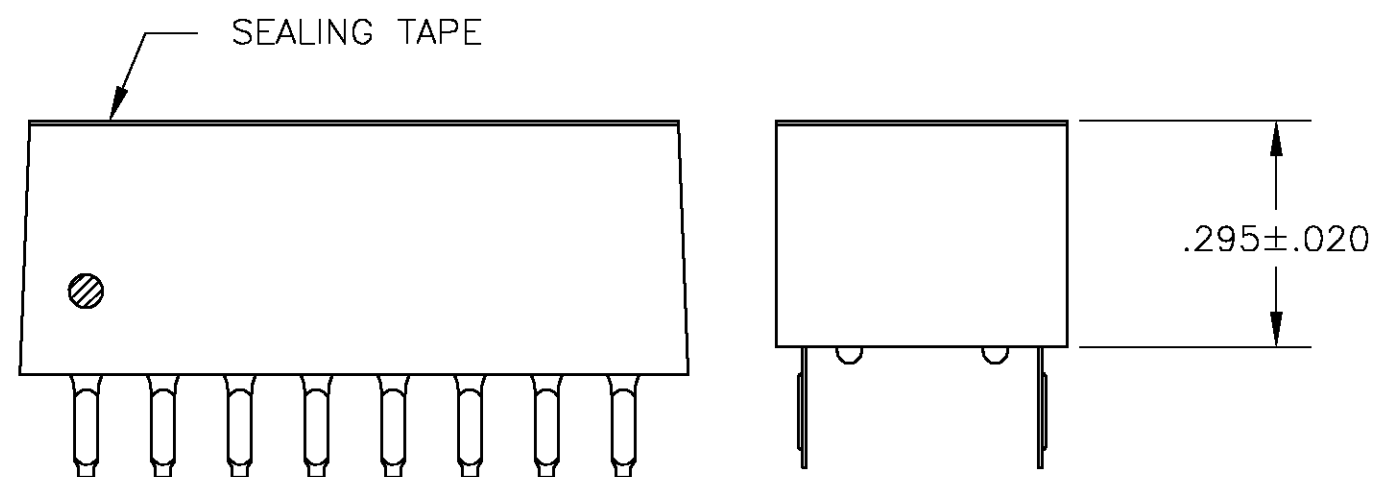


FIG 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.TALLEY 1-2-90	Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK R.MILLER 1-3-90	Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H.LEITER 1-3-90	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, LOW PROFILE	
2 PLC ± -	3 PLC ± .005	APPLICATION SPEC	SIZE A2	CAGE CODE 00779
4 PLC ± -	ANGLES ± -	WEIGHT -	DRAWING NO C=435626	RESTRICTED TO -
MATERIAL HOUSING & ROCKERS: POLYESTER CONTACTS: BERYLLIUM COPPER		FINISH CONTACTS: PLATED .000030 MIN GOLD IN CONTACT AREA OVER .000050 MIN NICKEL		SCALE 4:1
CUSTOMER DRAWING		SHEET 1 OF 1		REV BF