ROHS Compliant

台灣駿品端子股份有限公司
TAIWAN KING PIN TERMINAL CO.,LTD
台北縣樹林市俊德街 23 號
TEL:886-2-26895596.26886112 FAX:886-2-26886110
E-mail:tkp01.a88@msa.hinet.net http://www.tkp.com.tw

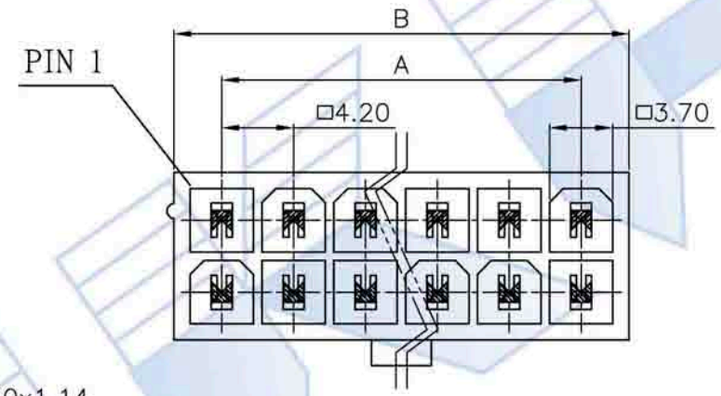

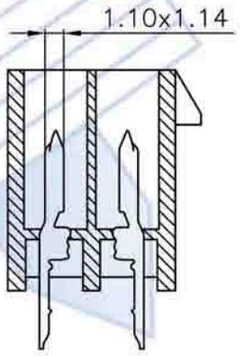

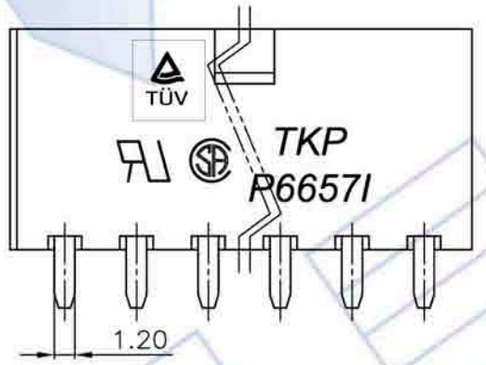

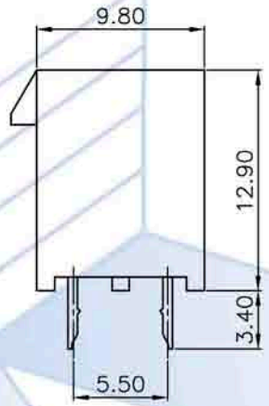

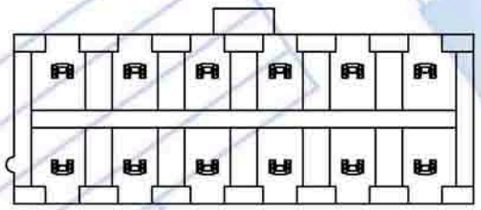

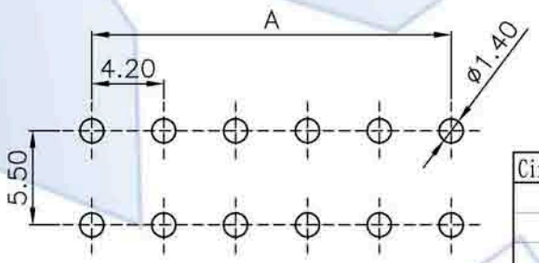

PCB LAYOUT FOR SURFACE MOUNTING

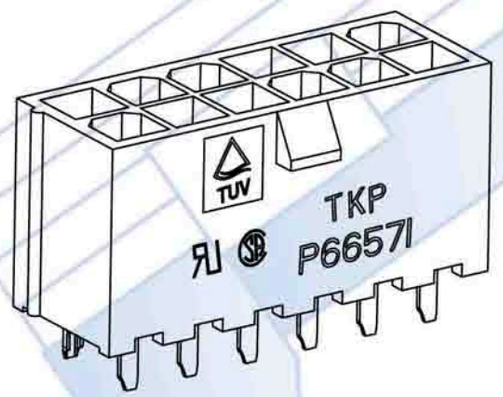

台灣駿品端子股份有限公司 TKP 2017.01.04 工程部出圖章

NOTE
* Material : Nylon UL 94V-2 or UL 94V-0
* Standard color : Natural , White or Black
* Contact : Brass
* Finish: Plated Tin or Gold Flash over Nickel
* Electrical rating : UL 250V 5A , AC/DC
  CSA 250V 4A , AC/DC
  TUV 250V 7A AC / DC
* Positive housing locks
* Split pins w/o pegs
* Mates with H6657R1 receptacle housings
* Dual row , 2-24 cirsuits available

Part NO.	Material	Color	Contact	Finish
P6657I-XX(LF)	Nylon UL 94V-2	Natural	Brass	Plated Tin/Lead over Nickel
P6657I-XX-V0(LF)	Nylon UL 94V-0	White	Brass	Plated Tin/Lead over Nickel
P6657I-XX-30u"(LF)	Nylon UL 94V-2	Natural	Brass	Gold Flash 30u" over Nickel
P6657I-XX/B(LF)	Nylon UL 94V-2	Black	Brass	Plated Tin/Lead over Nickel

Circuits	Part No.	Dim. A	Dim. B	Circuits	Part No.	Dim. A	Dim. B
2	P6657I-02(LF)	---	5.50	14	P6657I-14(LF)	25.20	30.70
4	P6657I-04(LF)	4.20	9.70	16	P6657I-16(LF)	29.40	34.90
6	P6657I-06(LF)	8.40	13.90	18	P6657I-18(LF)	33.60	39.10
8	P6657I-08(LF)	12.60	18.10	20	P6657I-20(LF)	37.80	43.30
10	P6657I-10(LF)	16.80	22.30	22	P6657I-22(LF)	42.00	47.50
12	P6657I-12(LF)	21.00	26.50	24	P6657I-24(LF)	46.20	51.70

E118260 LR82315 TÜV R50085738

PART NO.	P6657I-XX(LF)			Part NO.	Material	Color/Finish	Remark	APPROVAL
TITLE	4.20mm Wire to Wire			如上表				DRAWN: 吳嘉瑜
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE	DATE	ODD NUMBERS	REV	CHECKED: 張明遠
	1.5:1	mm	1/1	.X± 0.30 .XXX±0.10	2017.01.04	ENG950480	A4	APPROVED: 陳泓宇
	420-017		C420-004	.XX± 0.20 ANGLE±2°				