


DWG. NO. 201-351-0000N			
REV	DESCRIPTION	BY	APPD
C	ECR 6594	10/2/00	JED

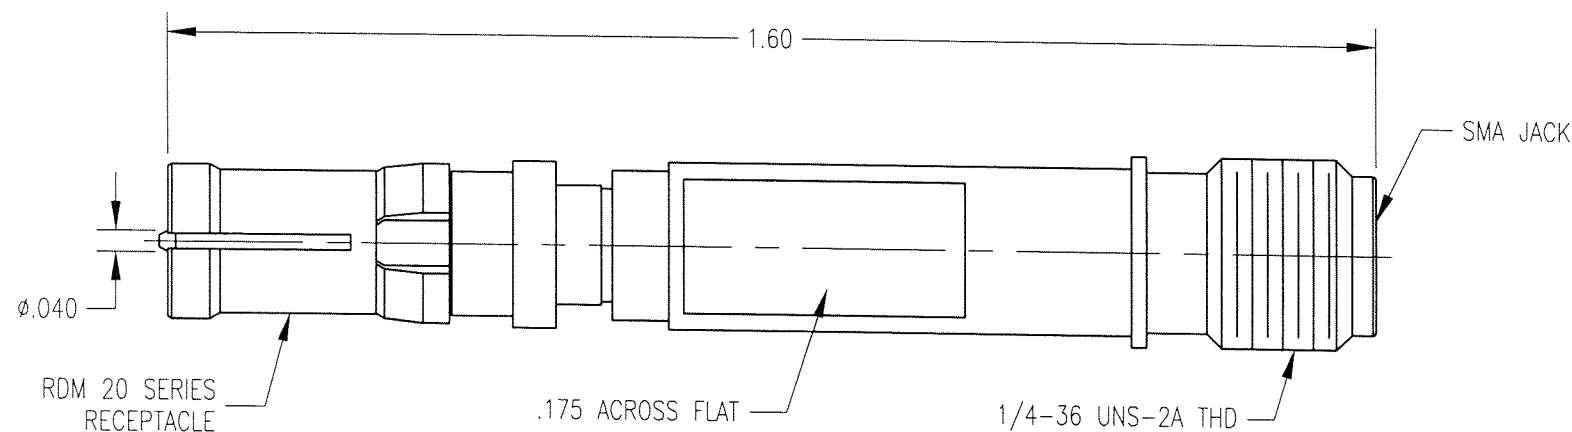

NOTES:

1. MATERIAL:

RDM BODY AND CONTACT: BERYLLIUM COPPER PER ASTM B196

SMA BODY: BRASS PER ASTM B16

INSULATOR: TEFLON PER ASTM D1710

CLIP RING: BERYLLIUM COPPER PER ASTM B194

2. FINISH:

BODIES AND CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
COPPER FLASH

CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS xx ± .01/0.254 xxx ± .005/0.127 ANGLES ± 2° SCALE: 4:1				Litton Winchester/Retconn 400 Park Road Waterford, Connecticut 06795				
CUSTOMER DRAWING			TITLE RDM RECEPTACLE TO SMA JACK ADAPTOR					
DRAWN JWH	DATE 9/28/00	CHECKED JED	DATE 10/3/00	A	201-351-0000N	Sht. 1	OF 1	REV. C
APPROVED JMC	DATE 10/4/00	APPROVED KJT	DATE 10/4/00					