


1602 SERIES



NON-ILLUMINATED, DOUBLE POLE
R62 16A-125V AC, 1/8 HP,
10A-250V AC, 1/3 HP

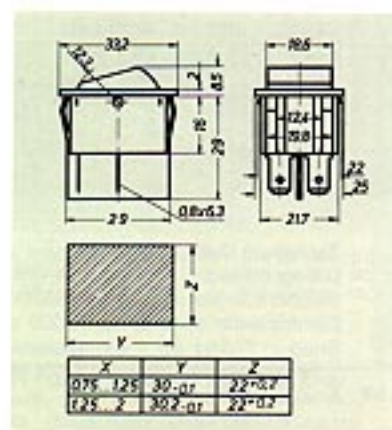

Technical Data

Mechanical-life endurance: 100,000 operations
Electrical-life endurance: 10,000 cycles
Snap in Fixing: for a wall thickness (X) of 0.75...2 mm
recommended cut-out (YxZ), see table
Ambient temperature: T 85

Materials


Rocker and housing: thermoplastic
Contacts: Ag
Terminals: silver-plated

Circuit	Function	Terminals	Catalog Number
DPST	ON-OFF	6.3 (.250)	1602.0101 R62 (White Base & Rocker, Red Marking O on Bezel)
DPST	ON-OFF	6.3 (.250)	1602.0105 R62 (Black Base & Rocker, Red Marking O on Bezel)
DPST	ON-OFF	6.3 (.250)	1602.0114 R62 (White Base & Rocker, Black Marking O, Vertical Mounting)
DPST	ON-OFF	6.3 (.250)	1602.0119 R62 (Black Base & Rocker, White Marking O, Vertical Mounting)
DPST	ON-OFF	6.3 (.250)	1602.0126 R62 (Black Base & Rocker, White Marking OFF-O, ON-I Vertical Mounting)
DPST	ON-OFF	6.3 (.250)	1602.0128 R62 (Black Base & Rocker, Matte Finish, White Marking O, Vertical Mounting)
DPST	ON-OFF	6.3 (.250)	1602.0130 R62 (Black Base & Rocker, Matte Finish, Red Marking O, on Bezel, Vertical Mounting)
DPDT	ON-ON	6.3 (.250)	1604.0101 R62 (White Base & Rocker)
DPDT	ON-ON	6.3 (.250)	1604.0105 R62 (Black Base & Rocker)

1605 SERIES



ILLUMINATED, DOUBLE POLE
R19 16A-125V AC, 1/8 HP
R61 10A-250V AC, 1/3 HP

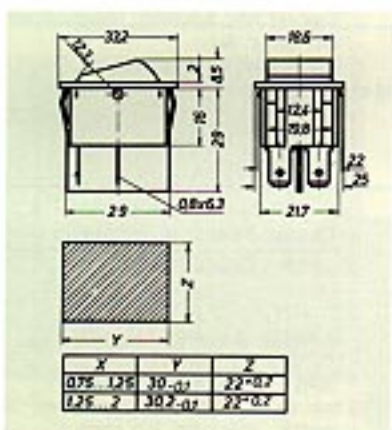

Technical Data

Mechanical-life endurance: 100,000 operations
Electrical-life endurance: 10,000 cycles
Snap in Fixing: for a wall thickness (X) of 0.75...2 mm
recommended cut-out (YxZ), see table
Ambient temperature: T 85

Materials

Rocker and housing: thermoplastic
Illuminated rockers: transparent thermoplastic
Contacts: Ag
Terminals: silver-plated

Circuit	Function	Terminals	Catalog Number
DPST	ON-OFF	6.3 (.250)	1605.0105 R61 (Black Base, Red Lens, 220V Bulb, Red Marking O on Bezel)
DPST	ON-OFF	6.3 (.250)	1605.0112 R61 (Black Base, Green Lens, 220V Bulb, Red Marking O on Bezel)
DPST	ON-OFF	6.3 (.250)	1605.0120 R19 (Black Base, Red Lens, 110V Bulb, Red Marking O on Bezel)
DPST	ON-OFF	6.3 (.250)	1605.0124 R19 (Black Base, Green Lens, 110V Bulb, Red Marking O on Bezel)
DPST	ON-OFF	6.3 (.250)	1605.0127 R61 (Black Base, Orange Lens, 220V Bulb, Red Marking O on Bezel)