



STANDARD AUTOMOTIVE BLADE FUSE CLIPS & HOLDERS



3522-2

FOR .205 (5.2) × .025 (.64) STANDARD BLADE FUSES


For Littelfuse ATO 257 series/Bussmann ATC series or equivalent

- Holds fuse securely, even after multiple insertions
- Thru hole-mount, maintains position during wave soldering
- Withstands the rigors of shock and vibration
- Holder design prevents solder wicking



VERTICAL FUSE ENTRY

SPECIFICATIONS


Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: Glass filled Nylon, UL Rated 94V-0
Current Rating: 30 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips



Mounting Detail For Two Clips




3522-3

CAT. NO. 3522-2

CAT. NO. 3522-3




VERTICAL ENTRY




SPECIFICATIONS

Contacts: .016 (.41) Brass
Current Rating: 20 Amps @ 500 VAC

Mounting Detail For Two Clips



LOW INSERTION FORCE



CAT. NO. 3522 Tin-Nickel Plate


CAT. NO. 3573 Matte Tin Plate



2 IN 1 FUSE HOLDER

For Littelfuse ATO 257 series/Bussmann ATC series, Littelfuse Low Profile Mini 897 series or equivalents


- Low insertion force
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Thru hole PC mountable, maintains position during wave soldering




SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: Nylon 4/6, UL Rated 94V-0
Current Rating: 20 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Mounting Detail




Mounting Detail



UNIVERSAL CLIP

For Littelfuse ATO 257 series/Bussmann ATC series, Littelfuse Mini 297 or 997 series/Bussmann ATM series, Littelfuse Low Profile Mini 897 series or equivalents

- Accepts most Auto-Blade Fuses
- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering



CAT. NO. 3557-2

CAT. NO. 3557 - Top Entry

CAT. NO. 3577 - Bottom Entry




HORIZONTAL FUSE ENTRY



- Designed for low height clearance applications
- Fuse will be inserted parallel to board
- Thru hole mount, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Polarized legs assure proper orientation of clips onto board

SPECIFICATIONS

Contacts: .012 (.30) Brass, Nickel Plate
Insulator: Nylon, UL Rated 94V-0
Current Rating: 15 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

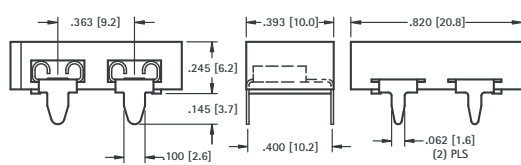

Mounting Detail For Two Clips

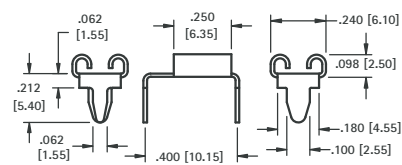

CAT. NO. 3550



CAT. NO. 3550-2

