CMC-0553-00-9 - ACTIVE

Raychem | Raychem CMC Series

TE Internal #: 595233-000 Raychem CMC Series, Power Cable, CMC, 600VAC Power Cable Voltage Rating, Operating Temperature Range -65 – 200 °C, 00AWG Wire Size

View on TE.com >

Wire & Cable > Power Cable



Power Cable Type: CMC Power Cable Voltage Rating: 600 VAC Power Cable Insulation Material: Radiation-Crosslinked, Modified Flexible ETFE Jacket Material: Radiation-Crosslinked, Modified Flexible ETFE Power Cable Jacket Color: White

Features

Product Type Features

Cable Insulation Style	Double
Power Cable Type	CMC
Wall Type	Dual



Product Type	Cable
Product Classification	Cable - Power
Configuration Features	
Number of Power Cable Conductors	1
Number of Strands	1330
Electrical Characteristics	
Power Cable Voltage Rating	600 VAC
Body Features	
Power Cable Wire Color	WT
Power Cable Insulation Material	Radiation-Crosslinked, Modified Flexible ETFE
Jacket Material	Radiation-Crosslinked, Modified Flexible ETFE
Power Cable Jacket Color	White
Power Cable Conductor Material	Nickel-Coated Copper

C For support call+1 800 522 6752

Dimensions

CMC-0553-00-9

Raychem CMC Series, Power Cable, CMC, 600VAC Power Cable Voltage Rating, Operating Temperature Range -65 – 200 °C, 00AWG Wire Size



Power Cable Wire Diameter	14.05 mm[.553 in]
Power Cable Conductor Diameter	11.61 mm[.457 in]
Length	50 ft
Strand Size	30 AWG
Wire Size	00 AWG
Overall Outside Diameter	14.05 mm[.553 in]
Usage Conditions	
Operating Temperature Range	-65 – 200 °C
Packaging Features	
Packaging Method	Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020

(209) Candidate List Declared Against: JAN 2019 (197) Does not contain REACH SVHC

Out of Scope - excluded from Halogen requirements

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


CMC-0553-00-9

Raychem CMC Series, Power Cable, CMC, 600VAC Power Cable Voltage Rating, Operating Temperature Range -65 – 200 °C, 00AWG Wire Size




TE Model / Part # 277152-4 TERMINAL,COPALUM R 2/0 3/8

Also in the Series | Raychem CMC Series

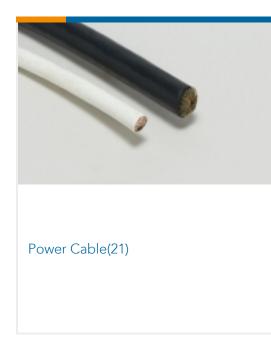

Customers Also Bought

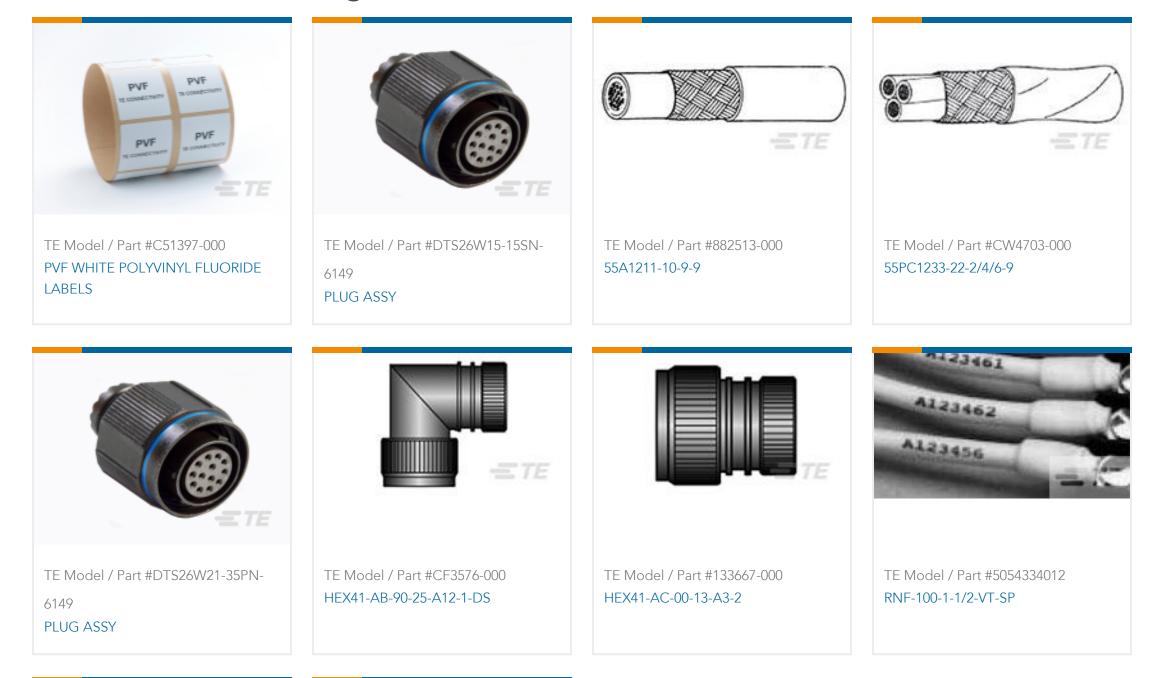



CMC-0553-00-9

Raychem CMC Series, Power Cable, CMC, 600VAC Power Cable Voltage Rating, Operating Temperature Range -65 – 200 °C, 00AWG Wire Size



Documents

Product Drawings CMC-0553-00-9

English

Datasheets & Catalog Pages Wire and Cable Overview

English

Product Specifications Product Specification

English