DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F
AJ	16		

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPD
	K	OBSOLETE: -14; EC 0U20-0064-01	27SEP01	TA

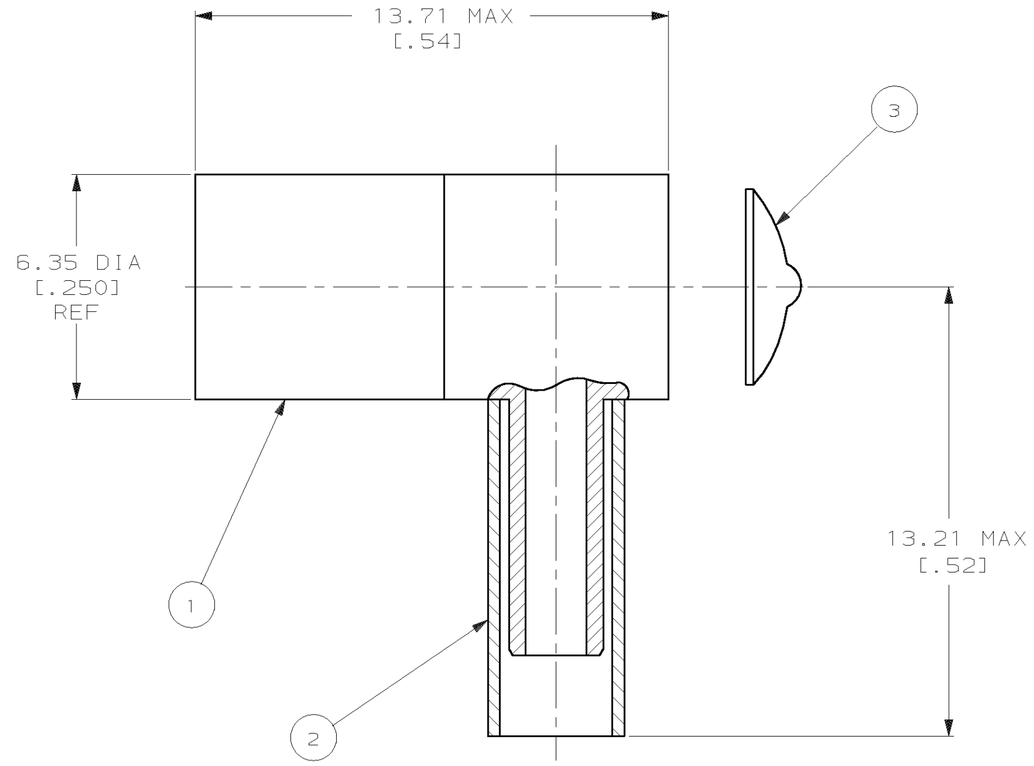

1. INTERFACE PER MIL-C-39012.
2. SEE INSTRUCTION SHEET 408-2987-9.
3. USES SCREW MACHINED CONTACT.

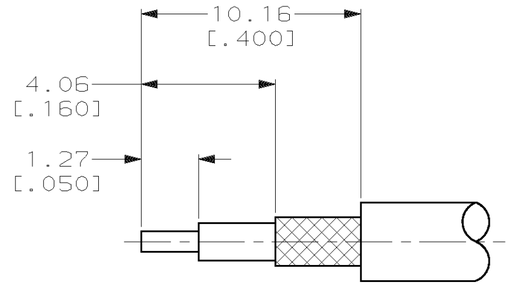

RECOMMENDED STRIP LENGTHS
SCALE NTS

POSITION LETTER	AMP DIE SET	HEX SIZE	DANIELS DIE SET	(3) END CAP QTY=1	(2) FERRULE QTY=1	(1) PLUG ASSY QTY=1	CABLE	PART NO
OBSOLETE	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-6	RG 174,188,316(ALL DBL SHIELDED)	3 1-414363-4
SUPERSEDED BY 1-414363-1	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-1	RG 174,188,316(ALL DBL SHIELDED)	1-414363-2
	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-1	RG 174,188,316(ALL DBL SHIELDED)	1-414363-1
	A	58483-1	.105	HX4-1637	414013-3	1-413889-5	414364-4	RG 178,196	414363-9
	A	58483-1	.105	HX4-1637	414013-3	1-413889-5	414364-3	RG 178,196	414363-8
	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-2	RG 174,188,316(ALL DBL SHIELDED)	414363-6
	B	58483-1	.128	HX4-1637	414013-3	1-413889-3	414364-2	RG 174,188,316	414363-5
	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-1	RG 174,188,316(ALL DBL SHIELDED)	414363-4
	B	58483-1	.128	HX4-1637	414013-3	1-413889-3	414364-1	RG 174,188,316	414363-3

TOOLING INFORMATION

AMP PRO-CRIMPER FOR BRAID CRIMP
M 22520/5-01 FOR BRAID CRIMP

414363

PART NO

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON :
2 PLC DEC ± 0.25 [.010]
3 PLC DEC ± 0.130 [.005]
ANGLES ± 1°

MATERIAL

FINISH

METRIC

DR	B. MOYER	6-19-92
CHK	J. FLANAGAN	6-25-92
APPD	J. FLANAGAN	6-25-92
APPD	M. SNEED	6-25-92
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	_	

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
PLUG,RTANG CRIMP,HEX CRIMP,SMB

SIZE	CAGE CODE	DRAWING NO
C	00779	414363

SCALE 8:1 SHEET 1 OF 1

CUSTOMER DRAWING