
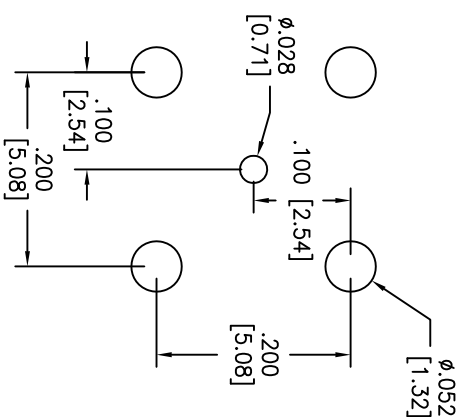
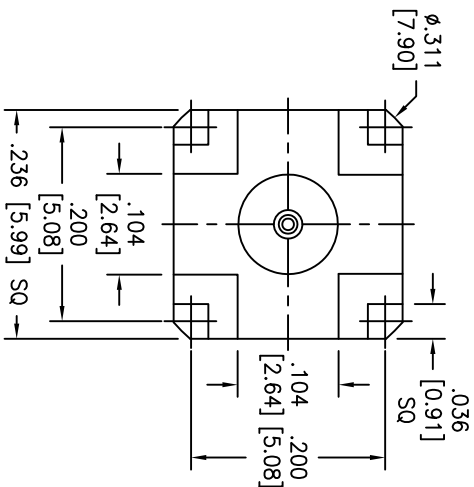


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/10/09	

APPROVED: _____
DATE: _____ TITLE: _____

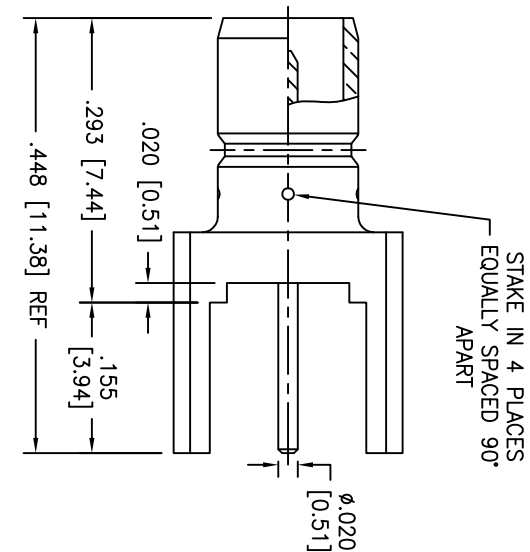

CONTACT PIN	BRASS	GOLD
INSULATOR	TEFLON	WHITE
BODY	BRASS	NICKEL
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
Nominal Impedance: 75 ohms
Frequency range: 0-4 GHz
Working Voltage: 335 VRMS max.
Dielectric Withstanding Voltage: 1000 VRMS min.
Contact Resistance: 6 Milliohms max. (Center Contact)
2.5 Milliohms max. (Outer Contact)
Insulator Resistance: 1000 Megohms min.
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE	SMB PCB MOUNT JACK (75 ohms)
SIZE	PART NO.
X	RF3-500-2
REF:	S00064T
SCALE:	NTS
SHEET	1 OF 1