

The **SM1720-37H** is a solid state GaAs amplifier designed for Personal Communications Systems. This unit operates over a frequency range of 1700-2000 MHz, provides 34 dB of gain with a gain flatness of $\pm .25$ dB, has a 1 dB compression point of +37 dBm, and an output third order intercept point of +51 dBm. The amplifier runs off a single supply voltage of +12 V. The unit uses the latest surface mount technologies to provide numerous features, while maintaining a minimal size.

Features

- Single Power Supply
- Over/Reverse Voltage Protection
- Thermal Protection with Auto Reset


Options

- Harmonic Filter
- Heatsink
- Logic On/Off Control



Parameter	Specification
Frequency Range	1.7 – 2.0 GHz
Pout (P1dB)	+ 37 dBm
Third Order Intercept Point	+ 51 dBm
Linear Gain	34 dB \pm 1.0 dB
Gain Flatness over Full Band	$\pm .25$ dB
Input/Output Return Loss	-14 dB / -16 dB
DC Supply Voltage	+ 12 Volts
DC Supply Current	1.9 Amps (max.), 1.6 Amps (typ.)
Mechanical Dimensions	5.0 x 2.5 x 0.6 inches
RF Connectors	SMA Female
Operating Temperature	0°C to +55°C
Operating Humidity	95% Non-condensing
Operating Altitude	Up to 10,000 feet above Sea Level

DIMENSIONS IN INCHES

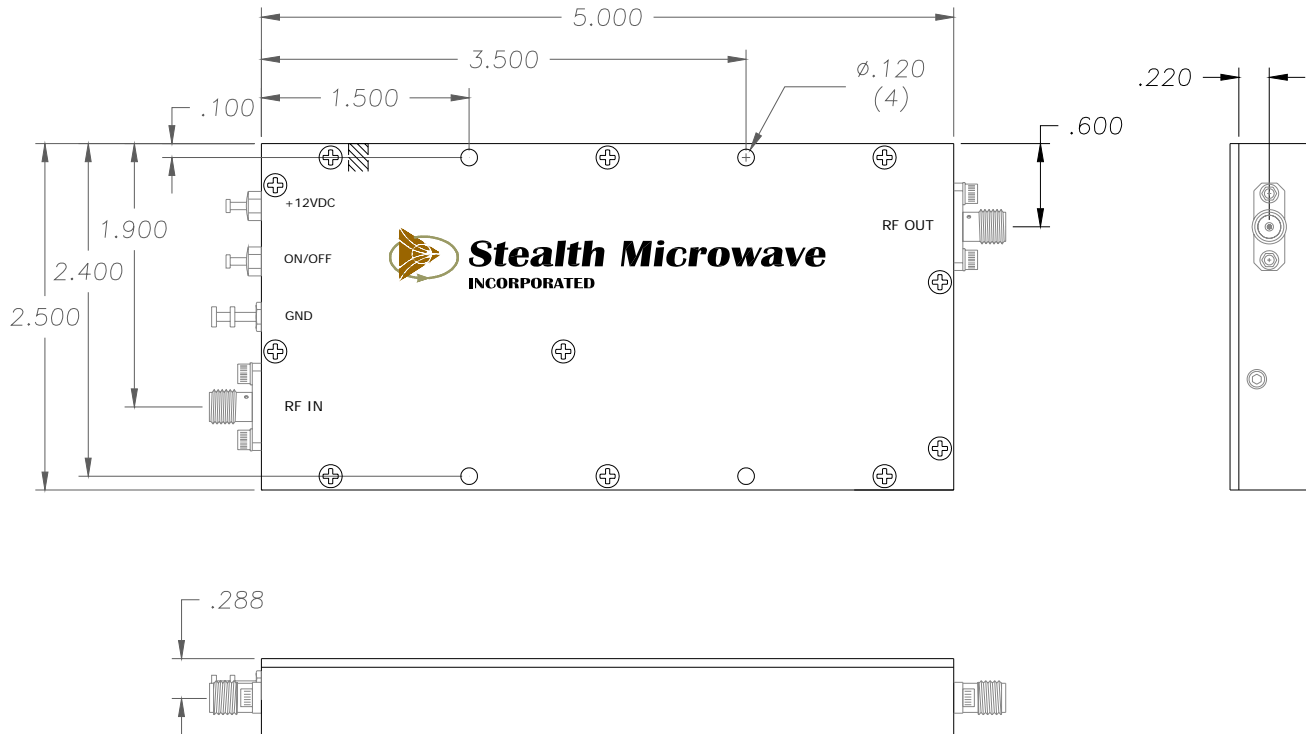

Pin	Description	Values
RF Input	Input Connector (SMA Female)	+3 dBm typ.
RF Output	Output Connector (SMA Female)	+ 37 dBm @ P1dB
GND	Ground Turret	---
+12VDC	DC Input Voltage	+ 12 Volts @ 1.6 Amps (typ.)
On/Off	TTL Logic On/Off	0 Volts = Off, +5 Volts = On

Specifications subject to change without notice.