

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0459856911](#)  
**Status:** **Active**  
**Overview:** EXTreme LPHPower Connectors  
**Description:** EXTreme LPHPower Header, Right-Angle, 6 Power Contacts, Select Gold (Au) Plating, for 3.18mm Thick PC Board

**Documents:**

[3D Model](#) [Packaging Specification PK-45984-001-001 \(PDF\)](#)  
[3D Model \(PDF\)](#) [Symbol Footprint Data SYM-45985-6911-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-45984-001-001 \(PDF\)](#)

**Agency Certification**


CSA LR19980  
 UL E29179

**General**

Product Family PCB Headers  
 Series [45985](#)  
 Application Board-to-Board, Power  
 Comments 6 Power Blades  
 Overview [EXTreme LPHPower Connectors](#)  
 Product Name EXTreme LPHPower  
 UPC 800756720487

**Physical**

(p)ower-(s)ignal Configuration 6p - 0s  
 Breakaway No  
 Circuits (Loaded) 6  
 Circuits (maximum) 6  
 Color - Resin Black  
 Durability (mating cycles max) 250  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part No  
 Material - Metal High Performance Alloy (HPA)  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Net Weight 6.476/g  
 Number of Rows 2  
 Orientation Right Angle  
 PC Tail Length 4.50mm  
 PCB Locator No  
 PCB Retention None  
 PCB Thickness - Recommended 3.18mm  
 Packaging Type Tray  
 Pitch - Mating Interface 12.00mm  
 Pitch - Termination Interface 2.00mm, 2.50mm  
 Plating min - Mating 0.762µm  
 Plating min - Termination 3.810µm  
 Polarized to Mating Part Yes  
 Polarized to PCB No  
 Shrouded Closed Ends

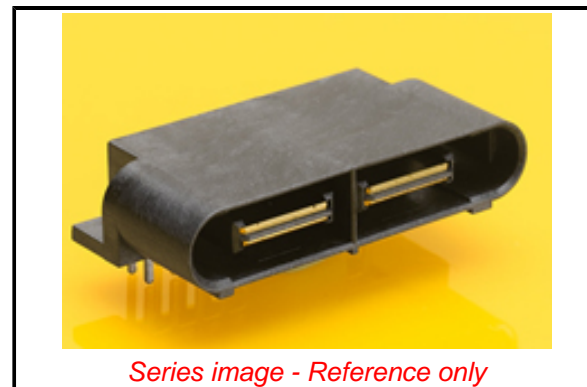

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
 D(2021)4569-DC (8  
 July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[45985 Series](#)

**Mates With**

[45984](#) EXTreme LPHPower PCB Receptacles

Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	27.0A
Voltage - Maximum	250V AC (RMS)/DC

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	015
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	230

**Material Info****Reference - Drawing Numbers**

Packaging Specification	PK-45984-001-001
Product Specification	PS-45984-001-001
Sales Drawing	SD-45985-102-001
Symbol/Footprint Data	SYM-45985-6911-001

This document was generated on 01/10/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[45985-6911](#)