

SAI-ADAPT-M12/M8 4P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



M8/M12 and M12/M8 adapters serve for quick implementation of the plug size.

General ordering data

Version	Y connector, M12 / M8
Order No.	1990560000
Type	SAI-ADAPT-M12/M8 4P
GTIN (EAN)	4050118376388
Qty.	1 pc(s).

Creation date July 21, 2021 12:10:36 PM CEST

Catalogue status 16.07.2021 / We reserve the right to make technical changes.

SAI-ADAPT-M12/M8 4P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	13 g
------------	------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection data

Single outlet 1 - plug-in connector	M12 pin	Single outlet 2 - plug-in connector	M8 socket
Tightening torque	M12: 0.8 Nm, M8: 0.5 Nm		

Technical data customisable plug-in connectors

Coding	M12 = A, M8 = none	Number of poles	4
Pollution severity	3	Protection degree	IP67
Rated current	4 A	Rated voltage	24 V
Temperature range of housing	-25...+85 °C	Threaded ring material	Diecast zinc, nickel-plated

General data

Coding	M12 = A, M8 = none	Conductor O.D.	-
Connection thread	M12 / M8	Number of poles	4
Pollution severity	3	Protection degree	IP67
Rated current	4 A	Rated voltage	24 V
Temperature range of housing	-25...+85 °C		

Classifications

ETIM 6.0	EC002925	ETIM 7.0	EC002925
ETIM 8.0	EC002925	ECLASS 9.0	27-44-01-06
ECLASS 9.1	27-44-01-06	ECLASS 10.0	27-44-01-06
ECLASS 11.0	27-44-01-06		

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN

Data sheet


SAI-ADAPT-M12/M8 4P

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

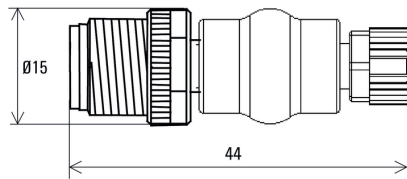

Wiring diagram

