

SD-3500 LED Modules

1310 nm Light Emitting Diode with Multi-Mode Fiber Receptacle

FEATURES

- I -40°C to 85°C Operating Temperature
- I High Efficiency
- I Hermetically sealed 3-pin metal case
- I Package with Multi-mode SC/FC/ST Connector

APPLICATIONS

- I FTTH
- I FDDI
- I Fast Ethernet


DESCRIPTION

The SD-3500 series are 1.3 μm band infrared Light Emitting diodes with multi-mode fiber receptacle for use as the light sources in optical fiber communications.

ELECTRICAL AND OPTICAL CHARACTERISTICS (T _C =25°C, CW, I _F =60mA)						
Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
P _o	Fiber Optical Coupled Power	62.5/125 μm MM fiber	30	--	--	μW
λ	Center Wavelength		1260	1310	1360	nm
Δλ	Spectral Width		--	--	180	nm
V _F	Forward Voltage			1.2	1.7	V
BW	Band width		120	--	--	MHz
Tr/Tf	Rise/Fall Time	10% to 90%	--	--	2.5	ns
ΔP _o /ΔT	Output Power over Temperature	-40°C to 85°C	--	--	±3	dB

ABSOLUTE MAXIMUM RATINGS (T _C =25 °C)			
Symbol	Parameter	Ratings	Unit
V _R	Reverse Voltage	2	V
I _F	Forward Current	150	mA
	Soldering	250°C/10sec	
T _{opr}	Operating Temperature	-40~+85	°C
T _{stg}	Storage Temperature	-40~+85	°C

MECHANICAL DIMENSION (mm) and PIN ASSIGNMENT

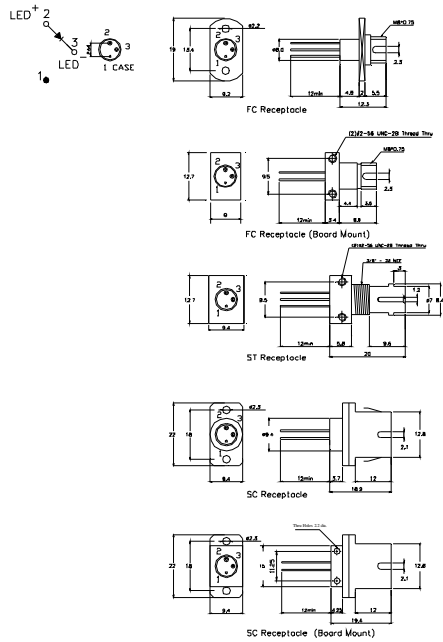

- Note:** 1. Specifications subject to change without notice.
 2. Other PIN assignment is available upon request.

ORDER INFORMATION

Part No.: S D - 3 5 0 0 -

Code	Connector Type
F	FC/PC
FB	FC/PC (Board Mount)
T	ST/PC
S	SC/PC
SB	SC/PC (Board Mount)
