


Economy Audio Dry (No DC) Coupling Transformers

- Metric size, low cost audio transformers - units on this page imported from offshore - not manufactured by Prem.
- All units individually tested, inspected and approved by Prem's Quality Assurance Department.

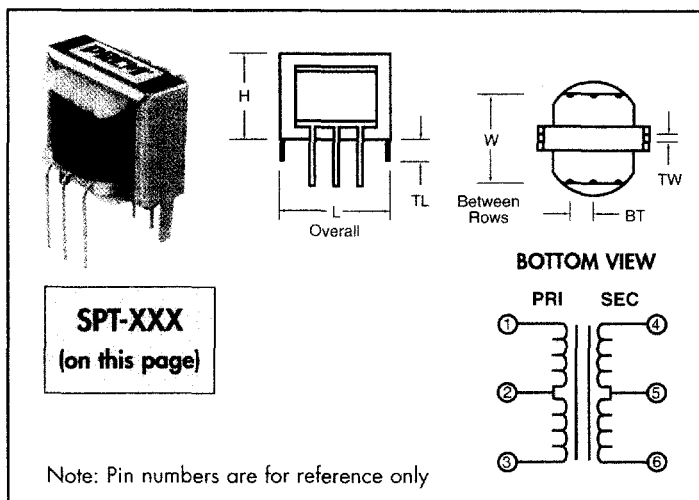

DIM.	Size 1 EI-14	Size 2 EI-16	Size 3 EI-19	Size 4 EI-24
L	15.2mm(.599")	17.7mm(.697")	20.3mm(.800")	25.3mm(1.00")
H	11.0mm(.433")	14.0mm(.551")	16.2mm(.640")	19.0mm(.750")
W	12.0mm(.473")	16.0mm(.630")	14.5mm(.571")	16.9mm(.666")
TW	2.0mm(.079")	2.2mm(.086")	2.2mm(.086")	2.6mm(.102")
TL	3.8mm(.150")	4.0mm(.157")	4.2mm(.165")	4.8mm(.189")
BT	2.5mm(.098")	2.8mm(.110")	3.0mm(.118")	4.5mm(.177")

All Dimensions Nominal

- ▲ Dielectric Strength – 1000VAC (PRI-SEC-CORE)
- ▲ Resistances $\pm 20\%$
- ▲ All Impedances $\pm 10\%$ (at 1KHz)

**Call Us Anytime
for Technical Assistance!**
BUY PREM DIRECT
(815) 385-2700

Fax: (815) 385-8578

E-Mail: sales@premmag.com

Visit our Website:

<http://www.premmag.com>



PREM	SIZE	DESCRIPTION	IMPEDANCE Ω		DC RESISTANCE Ω	
			PRI	SEC	PRI	SEC
SPT-201	1	Output	500 C.T.	8 C.T.	35	.8
SPT-130	1	Coupling	600 C.T.	600 C.T.	45	40
SPT-202	1	Output	1K C.T.	8 C.T.	60	.8
SPT-203	1	Coupling	10K C.T.	600 C.T.	450	100
SPT-204	1	Driver	10K C.T.	2K C.T.	500	200
SPT-301	2	Output	500 C.T.	8 C.T.	22	.8
SPT-302	2	Interstage	500 C.T.	500 C.T.	30	28
SPT-303	2	Output	1.2K C.T.	8 C.T.	80	.8
SPT-304	2	Output	48 C.T.	8 C.T.	2.5	.5
SPT-305	2	Output	200 C.T.	8 C.T.	12	.8
SPT-400	3	Output	200 C.T.	8 C.T.	12	.8
SPT-401	3	Output	500 C.T.	8 C.T.	26	.8
SPT-129	3	Coupling	600 C.T.	600 C.T.	65	55
SPT-402	3	Output	800 C.T.	8 C.T.	40	.8
SPT-403	3	Output	1.2K C.T.	8 C.T.	80	.8
SPT-404	3	Interstage	1.5K C.T.	500 C.T.	120	50
SPT-405	3	Coupling	10K C.T.	600 C.T.	600	100
SPT-406	3	Driver	10K C.T.	2K C.T.	600	155
SPT-500	4	Output	48 C.T.	8 C.T.	2.5	.5
SPT-501	4	Output	120 C.T.	8 C.T.	7.0	.7
SPT-502	4	Output	200 C.T.	8 C.T.	12.0	.5
SPT-503	4	Output	500 C.T.	8 C.T.	18.0	.7
SPT-504	4	Interstage	500 C.T.	500 C.T.	35	28
SPT-505	4	Driver	10K C.T.	2K C.T.	600	155
SPT-506	4	Output	1.2K C.T.	8 C.T.	75	.8
SPT-507	4	Coupling	600 C.T.	600 C.T.	65	55

Size 1- EI-14 SERIES .075 WATTS MAX./ TCW LEADS .40mm DIA. (.0159) #26 AWG

Size 2- EI-16 SERIES .100 WATTS MAX./ TCW LEADS .43mm DIA. (.0179) #25 AWG

Size 3- EI-19 SERIES .200 WATTS MAX./ TCW LEADS .43mm DIA. (.0179) #25 AWG

Size 4- EI-24 SERIES .460 WATTS MAX./ TCW LEADS .48mm DIA. (.020) #24 AWG