

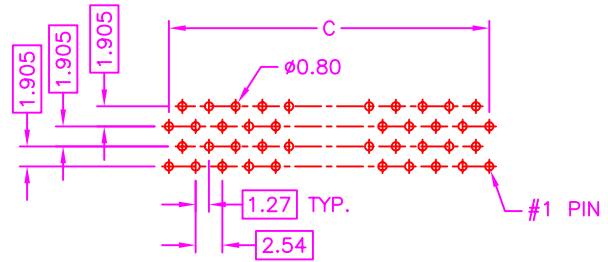
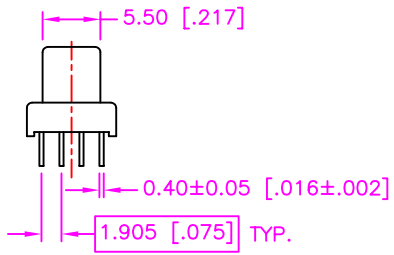
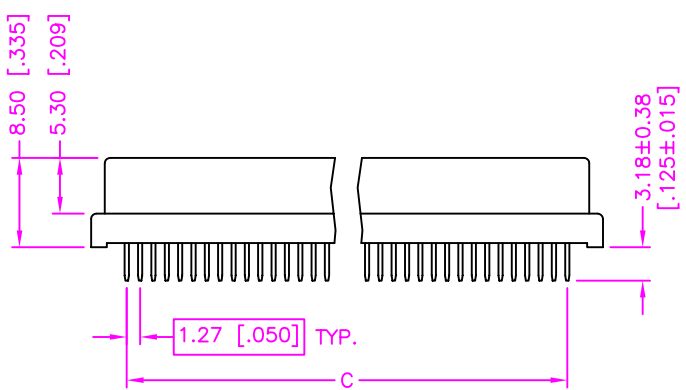


| REV. | DESCRIPTION | DATE |
|------|-----------------|---------------|
| A | RELEASE | May 1, 2000 |
| B | MATERIAL MODIFY | Jun. 1, 2001 |
| C | DRAW MODIFY | Jun. 17, 2004 |

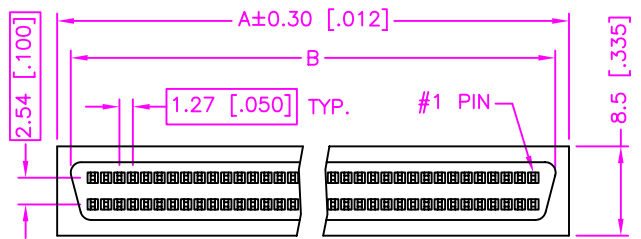

RECOMMEND P.C.B. LAYOUT (50 PINS)
BOTTOM VIEW

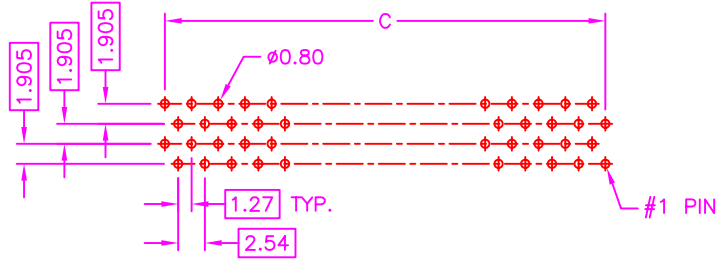

RECOMMEND P.C.B. LAYOUT (68, 80 PINS)
BOTTOM VIEW


MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. DURABILITY : 500 CYCLES.

ORDER INFORMATION :

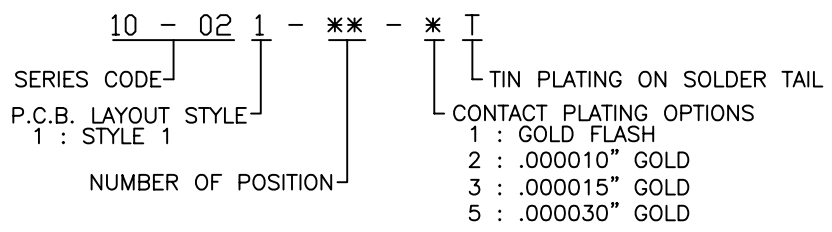

| Number Of Position | DIMENSIONS | | |
|--------------------|--------------|--------------|--------------|
| | A | B | C |
| 68 | 48.60[1.913] | 46.13[1.816] | 41.91[1.650] |
| 80 | 56.28[2.216] | 53.75[2.116] | 49.53[1.950] |

| | | |
|--|----------------------|---|
| TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3' | DRAWER <i>SUE</i> | Astron WWW.ASTRON.COM.TW |
| UNITS : mm [inch] | CHECK <i>SRP</i> | |
| SCALE NONE | APP'D <i>LION</i> | NAME SCSI SERIES PIN TYPE, STYLE 1, FEMALE VERTICAL, ALL PLASTIC |
| SIZE A4 | PRODUCT SPEC. --- | DRAW NO. C451-0003 |
| SHEET 1 OF 1 | 303-0001 | REV. C |
| | | 09006 |