

Raychem

TE Internal #: 008805-000 Hook Up Wire, FlexLite DW, 600V Voltage Rating, Blue Wire Color, 16AWG Wire Size, 1.31mm² Wire Size, Operating Temperature Range -65 – 125 °C

View on TE.com >

Wire & Cable > Hook Up Wire



Cable Type: FlexLite DW Voltage Rating: 600 V Wire Color: Blue Insulation Material: Radiation-Crosslinked, Polyalkene Conductor Material: Tin-Plated Copper

Features

Product Type Features

Product Type

Product Classification

Wire

Wire - Commercial



Cable Style	Primary, Stranded	
Cable Type	FlexLite DW	
Configuration Features		
Number of Conductors	1	
Number of Strands	19	
Electrical Characteristics		
Resistance (Max)	15.8 Ω/1000 ft @ 68°F	
Voltage Rating	600 V	
Body Features		
Weight	14.58 kg/km	
Wire Color	Blue	
Insulation Material	Radiation-Crosslinked, Polyalkene	
Conductor Material	Tin-Plated Copper	
Dimensions		
Wire Diameter	2.058 mm[.081 in]	

FLDWC0311-16-6

Hook Up Wire, FlexLite DW, 600V Voltage Rating, Blue Wire Color, 16AWG Wire Size, 1.31mm² Wire Size, Operating Temperature Range -65 – 125 °C



Overall Outside Diameter	2.13 mm[.0839 in]	
Overall Outside Diameter Range	1.98 – 2.13 mm[.078 – .084 in]	
	16 AWG	
Conductor Diameter	1.33 mm[.053 in]	
Cable Insulation Thickness	.127 mm[.005 in]	
Strand Size	29 AWG	
Wire Size	1.31 mm ²	
Usage Conditions		
Operating Temperature Range	-65 – 125 °C	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUL 2019	

Halogen Content

Does not contain REACH SVHC

(201)

Out of Scope - excluded from Halogen requirements

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts


FLDWC0311-16-6

Hook Up Wire, FlexLite DW, 600V Voltage Rating, Blue Wire Color, 16AWG Wire Size, 1.31mm² Wire Size, Operating Temperature Range -65 – 125 °C



	antan Henna an	
-		ETE
TE Model / Pa D-436-37	rt # 650075-0	100

Customers Also Bought

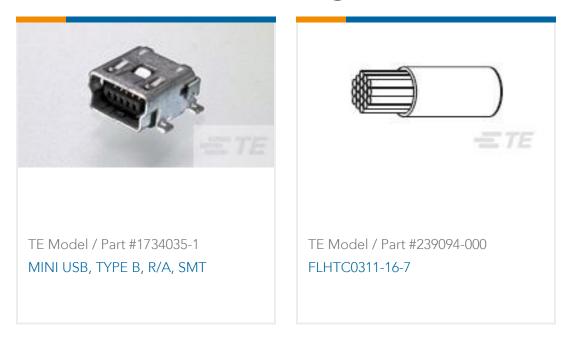

Documents

Product Drawings FLDWC0311-16-6

English

Datasheets & Catalog Pages

1654025_Sec9_FlexLite

English

Wire and Cable Overview

English

Product Specifications **Product Specification**

English