



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

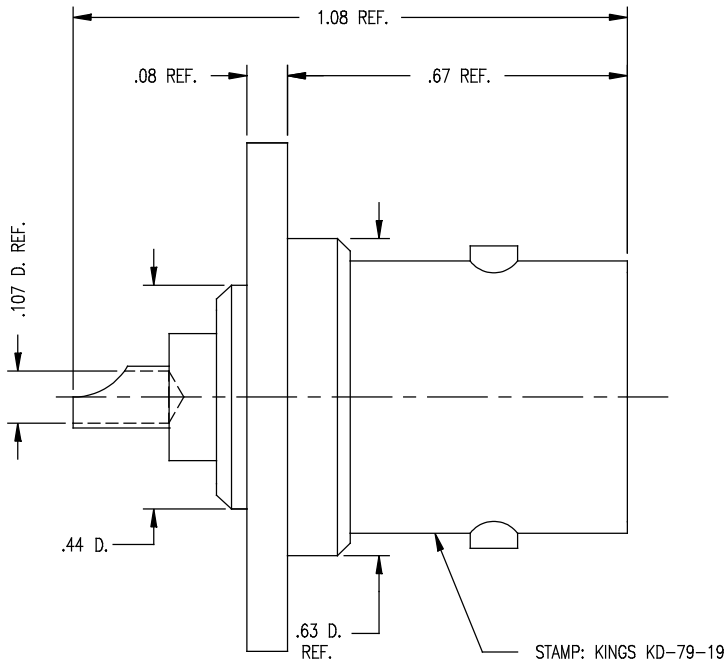

- NOTES:
1. INTERFACE PER MIL-STD-348, FIG. 302-2.
 2. MATERIALS:
INSULATORS-TEFLON, ASTM-D-1457
C-RING-COPPER WIRE QQ-W-336
CENTER CONTACT-BER. COP., ASTM-B-196
BODY-BRASS, ASTM-B16
 3. FINISHES:
CENTER CONTACTS } SILVER PLATE PER QQ-S-365
C-RING }
BODY-KINGS TARNISH RESISTANT FINISH (TR-5)
 4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-1000 VRMS

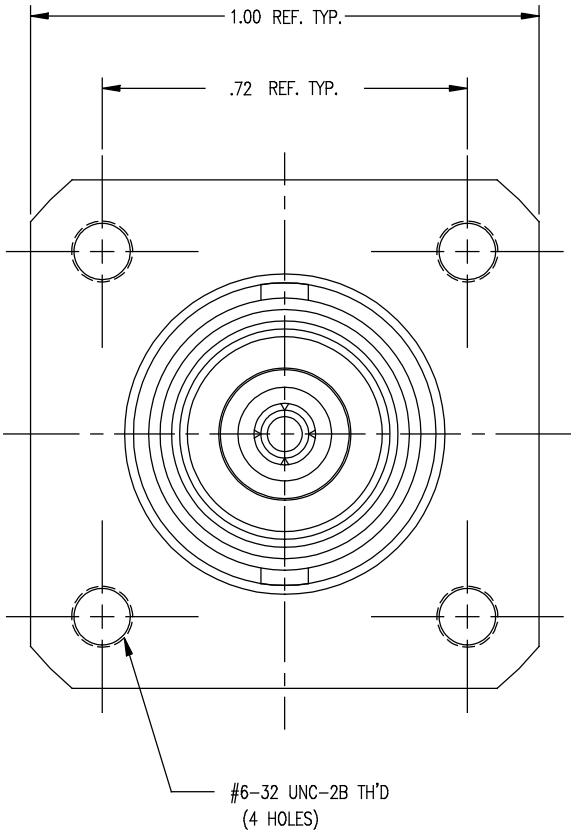

GSD

GSD

KD-79-19

REVISIONS			
ISSUE	CHANGES		
2	CN 33323 C REDRAWN KH 09/12/91		
3	CN 33912 C KH 06/11/92		
KAM1427			
SCALE 4:1			
APPROX SURFACE AREA			
USED ON			
REF:			
RECEPTACLE, PANEL, C			
DRAWN	KH	DATE	09/12/91
DESIGN	LI	DATE	09/12/91
APPR.		DATE	
 KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707			
KD-79-19			