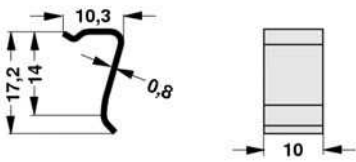
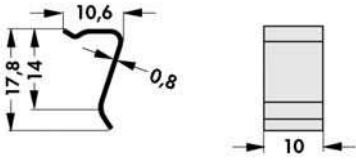
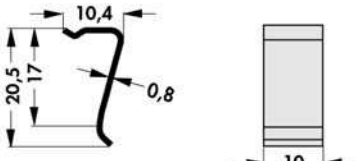


Retaining springs for transistors

art. no.	for transistor-housing	suitable for heatsinks	spring force [N]		
THFU 1	TO 218 TO 220 TO 247 TO 248 TO 3 P	SK 480	60 ±5	RS	
		SK 481			
		SK 482			
		SK 483			
		SK 487			
		SK 489			
		SK 490			
		SK 492			
		SK 495			
		SK 499			
		SK 512			
		SK 514			
		SK 573			
		SK 574			
		SK 575			
		SK 576			
THFU 2	TO 218 TO 220 TO 247 TO 248 TO 3 P	SK 480	60 ±5	RS	
		SK 481			
		SK 482			
		SK 483			
		SK 487			
		SK 489			
		SK 490			
		SK 492			
		SK 495			
		SK 499			
		SK 512			
		SK 514			
		SK 573			
		SK 574			
		SK 575			
		SK 576			
THFU 3	TO 218 TO 220 TO 247 TO 248 TO 3 P	SK 480	50 ±5	RS	
		SK 481			
		SK 482			
		SK 483			
		SK 487			
		SK 489			
		SK 490			
		SK 492			
		SK 495			
		SK 499			
		SK 512			
		SK 514			
		SK 573			
		SK 574			
		SK 575			
		SK 576			

material: RS = stainless steel

Profiles for PCB components
Heatsink profile-overview
Assignment table
Heatsinks for PCB

→ A 91
→ A 13 - 16
→ A 18 - 20
→ A 89 - 91

Profiles for lock-in fixing spring
Profiles for PCB mounting
Thermal conductive material
Mounting parts for heatsinks

→ A 85 - 88
→ A 89 - 110
→ E 2 - 15
→ E 40 - 41

A 116

A

B

C

D

E

F

G

H

I

K

L

M

N