




60A CURRENT TRANSFORMER, P/N 5309

ELECTRICAL SPECIFICATIONS	
PRIMARY CURRENT:	60 A NOM., 200 A MAX.
URNS RATIO:	1000:1 NOMINAL
VOLT PER AMP RATIO AT 60 A, FOR 100 OHM LOAD:	0.100 V/A
VOLT PER AMP RATIO AT 6.0A, FOR 100 OHM LOAD:	0.0984 V/A
D.C.RESISTANCE AT 20°C:	23 OHMS
DIELECTRIC WITHSTANDING VOLTAGE:	4kV RMS

MECHANICAL SPECIFICATIONS	
PARAMETER	
MOLDED/OR CUP	POLYURETHANE OR EPOXY ENCAPSULATED/DAP, EPOXY, NYLON OR RYNITE
FLAMMIBILITY	CONFORMS TO UL94-V0
TERMINALS	PC PINS, 0.031IN RD. OR 0.025IN SQ.
MARKING	AMECON, PART NUMBER, DATECODE, DOT AT START PIN.
APPROX. WEIGHT	0.11#
TOLERANCES:	.X: ±0.1 .XX: ±0.03 .XXX: ±0.01

ENVIRONMENTAL SPECIFICATION	
STORAGE TEMP.	-55°C < T _c < +130°C
INSULATION RESISTANCE	100 MEGOHMS MINIMUM.

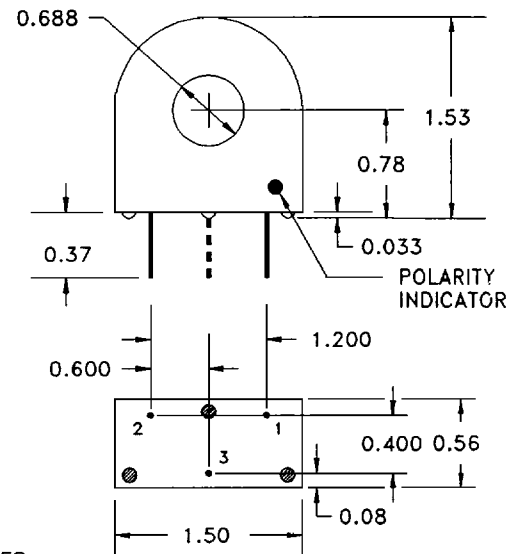

NOTES:
 UNLESS REQUESTED, THE TERMINATING RESISTOR AND THE ONE-TURN PRIMARY ARE NOT SUPPLIED.
 PIN 3: SUPPLIED ON REQUEST FOR CENTER-TAPPED DESIGNS OR MECHANICAL SUPPORT.

